
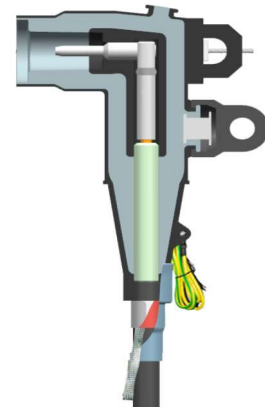
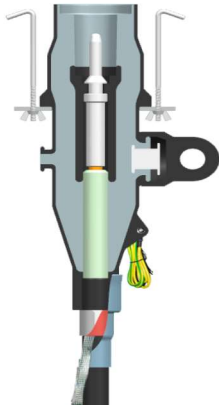


## YAMUNA DENSON'S Pre Moulded Elbow & Straight Connectors up to 24kV 250A for XLPE/EPR Insulated Cable (15-24kV) DECR/DECS (for Type-A Bushing)

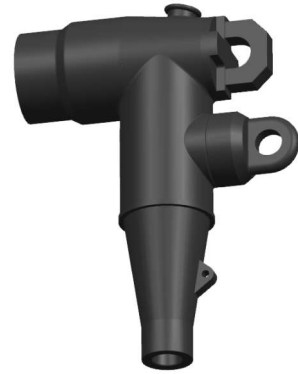

**Straight Connector**

**Elbow Connector**

### Features :

- Safe to touch
- Capacitive test point
- Faster installation
- Non-corrosive and UV resistant
- In-built stress control offering high stress control properties
- Outstanding mechanical, chemical & electrical properties
- Unlimited shelf-life
- In compliance with IEC-60502-4

*Shock Proof*



CESI



KEMA



### Dimension Chart for Pre Moulded Elbow Connectors up to 24 kV 250A


DECR	Elbow Connectors 24 kV 250A		
<b>Power Function</b>	Rated Voltage	15kV	24kV
	Rated Current	250A	250A
	Frequency Withstand Voltage	39kV/5min	54kV/5min
	Partial Discharge	15kV ≤10pC	20kV ≤10pC
	Impulse Voltage (± 10 time)	95kV	125kV
	Overcurrent (max. = 8h)	300A	300A
	Screen Resistance	≤5000Ω	≤5000Ω
	Application Cable (x-section)	25-120mm <sup>2</sup>	25-120mm <sup>2</sup>

**Remarks:** Comply with IEC 60502-4 requirements



#### Type of Terminations

**DECR-15-24/250A-XXX**

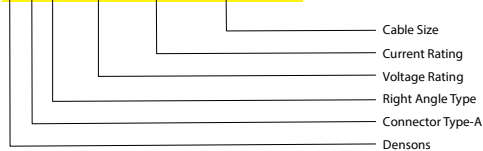

### Dimension Chart for Pre Moulded Straight Connectors upto 24 kV 250A

DECS	Straight Connectors 24 kV 250A		
<b>Power Function</b>	Rated Voltage	15kV	24kV
	Rated Current	250A	250A
	Frequency Withstand Voltage	39kV/5min	54kV/5min
	Partial Discharge	15kV ≤10pC	20kV ≤10pC
	Impulse Voltage (± 10 time)	95kV	125kV
	Overcurrent (max. = 8h)	300A	300A
	Screen Resistance	≤5000Ω	≤5000Ω
	Application Cable (x-section)	25-120mm <sup>2</sup>	25-120mm <sup>2</sup>

**Remarks:** Comply with IEC 60502-4 requirements



#### Type of Terminations

**DECS-15-24/250A-XXX**

