


YAMUNA DENSONS Weatherproof Type Double Compression Cable Gland Suitable For Armoured Cables

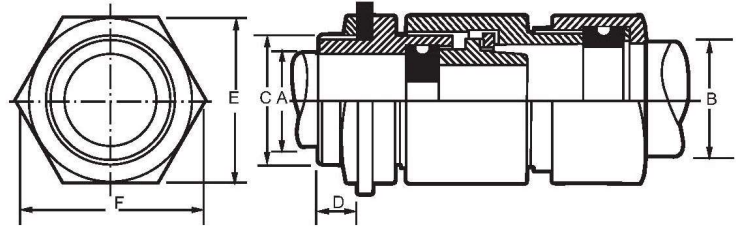

Dimensions For Double Compression Gland

Cable Dimensions			Gland Dimensions					
A (Under armour Dia) mm	B (Overall Dia) mm	Armour Diameter mm	Entry Thread		D (Length) mm	E (Across Flat) mm	F (Across Corner) mm	Item Code
			C					
			(ET)	(MM)				
8.0	12.0	0.8/1.4	3/4	M20	15.0	21.5	24.5	DBW01SS
11.0	16.5	0.8/1.4	3/4	M20	15.0	25.0	29.0	DBW01S
12.0	18.0	0.8/1.4	3/4	M20	15.0	28.0	32.0	DBW01
12.0	18.0	0.8/1.4	1	M25	15.0	28.0	32.0	DBW01A
14.0	20.0	0.8/1.4	1	M25	15.0	31.5	36.5	DBW02
14.0	20.0	0.8/1.4	3/4	M20	15.0	31.5	36.5	DBW02A
17.0	23.0	0.8/1.4	1	M25	15.0	32.0	37.0	DBW03
20.0	26.0	0.8/1.4	1	M25	15.0	38.0	44.0	DBW04
20.0	26.0	0.8/1.4	1.1/4	M32	15.0	38.0	44.0	DBW04A
24.0	30.0	0.8/1.4	1.1/4	M32	15.0	41.0	47.0	DBW05
24.0	30.0	0.8/1.4	1.1/2	M40	15.0	41.0	47.0	DBW05A
27.0	33.0	0.8/1.4	1.1/2	M40	15.0	47.0	54.0	DBW06
27.0	33.0	0.8/1.4	1.1/4	M32	15.0	47.0	54.0	DBW06A
30.0	37.0	0.8/1.4	1.1/2	M40	15.0	52.0	58.0	DBW07
35.0	41.0	0.8/1.4	2	M50	15.0	56.0	64.0	DBW08
40.0	46.0	0.8/1.4	2	M50	15.0	59.0	67.0	DBW09
46.0	52.0	0.8/1.4	2	M50	20.0	66.5	77.0	DBW010
46.0	52.0	0.8/1.4	2.1/2	M63	20.0	66.5	77.0	DBW010A
50.0	56.0	0.8/1.4	2.1/2	M63	20.0	74.0	85.0	DBW011S
54.0	60.0	0.8/1.4	2.1/2	M63	20.0	80.0	92.0	DBW011
60.0	66.0	0.8/1.4	3	M75	20.0	85.0	97.0	DBW012
66.0	72.0	0.8/1.4	3	M75	20.0	90.0	103.0	DBW013A
72.0	78.0	0.8/1.4	3.1/4	M82	20.0	99.0	113.0	DBW013
78.0	84.0	0.8/1.4	3.1/2	M90	20.0	105.0	122.0	DBW014
88.0	94.0	0.8/1.4	4	M100	20.0	117.0	135.0	DBW015
98.0	105.0	0.8/1.4	4.1/2	M110	20.0	130.0	149.0	DBW016